




Robilo®


Rope-Operated Two-Piece Extension Ladder

- Two-piece aluminum rung ladder with comfortable rung level adjustment by plastic rope for working in high working heights
- Non-slip, 2-component footcaps: The hard component ensures a strong connection of the cap with the rail; the soft component provides a strong surface stiction and prevents slipping of the ladder
- Automatic locking of catch hook from rung to rung prevents the accidental sliding-down of the upper ladder part
- Wall rollers allow comfortable extension and retraction of the ladder sections (starting with 2x18 rungs)




Certificate
EN 131
Norm

Work. height up to ca. m A	5,50	6,35
Work. height up to ca. m A1	8,75	10,10
Length retracted ca. m C	4,35	5,20
Length extended ca. m C1	7,70	9,10
No. of rungs	2x15	2x18
Weight ca. kg	20,0	26,0
Transport dimensions	Length ca. m	4,36
	Width ca. m	0,44
	Height ca. m	0,15
Art.-No.	120663	120670

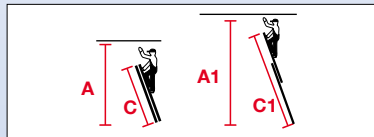

For the **CombiSystem** (Safety Accessories) and other accessories refer to page 112.
Suitable for this ladder:
CombiSystem 1, 2, 3, 4, 5, 6, 8

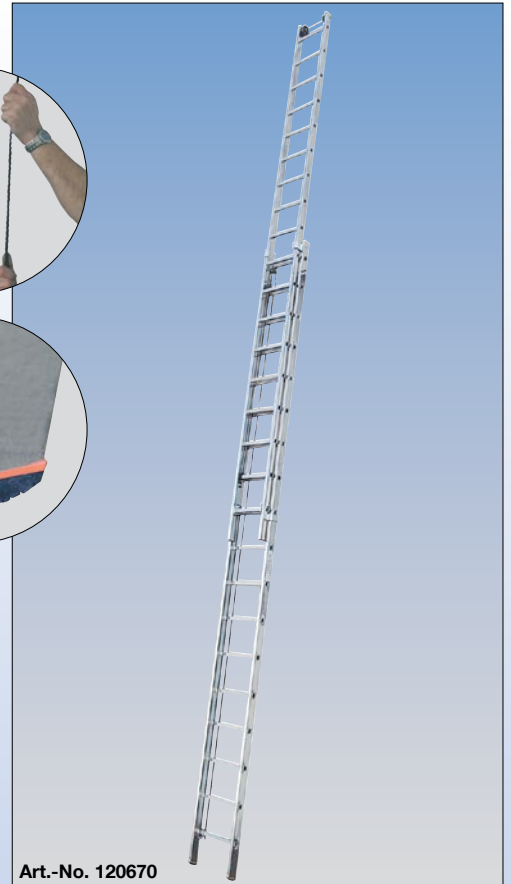

Art.-No. 120670