



## Stairs with Platform, mobile (Light Metall)

- Stable mobile aluminium stairs, the safe and mobile working appliance for all areas of application, according the regulations of EN ISO 14122
- Width of steps: 600 - 800 - 1000 mm
- Depth of steps: 225 mm by 45° and 175 mm by 60° inclination
- Aluminium grating / perforated steps on request
- Standard depth of platform: 700 mm, extension and widening on request available
- Delivery with hand rail on both sides and all around 1100 mm high platform railing with knee and foot rail
- Hand rails are equipped with a knee rail by stairs with inclination of 45°
- 2 guide casters ø 160 mm with parking brakes at the ascending part and 2 casters ø 160 mm with parking brakes at the supporting part
- Stable stabilizer gear at the supporting part
- Delivery in pre-assembled component groups
- Stairs with other inclinations, step width and surface as special constructions on request available

### Inclination 45°

No. of steps		4	6	8	10	12	14	16	18
Vertical height E	mm	646 - 860	1076 - 1290	1506 - 1720	1936 - 2150	2366 - 2580	2796 - 3010	3226 - 3440	3656 - 3870
Projection D	mm	1227 - 1441	1657 - 1871	2087 - 2301	2516 - 2731	2947 - 3161	3376 - 3591	3807 - 4021	4237 - 4451
Stabilizer gear width F	mm	1000	1000	1400	1400	1600	1600	1800	1800
Step width B 600 mm	<b>Art.-No.</b>	<b>827838</b>	<b>827852</b>	<b>827876</b>	<b>827890</b>	<b>827913</b>	<b>827937</b>	<b>827951</b>	<b>827975</b>
Step width B 800 mm	<b>Art.-No.</b>	<b>828033</b>	<b>828057</b>	<b>828071</b>	<b>828095</b>	<b>828118</b>	<b>828132</b>	<b>828156</b>	<b>828170</b>
Step width B 1000 mm	<b>Art.-No.</b>	<b>828231</b>	<b>828255</b>	<b>828279</b>	<b>828293</b>	<b>828316</b>	<b>828330</b>	<b>828354</b>	<b>828378</b>

### Inclination 60°

No. of steps		4	6	8	10	12	14	16	18
Vertical height E	mm	751 - 1000	1251 - 1500	1751 - 2000	2251 - 2500	2751 - 3000	3251 - 3500	3751 - 4000	4251 - 4500
Projection D	mm	1073 - 1216	1362 - 1505	1650 - 1794	1939 - 2082	2228 - 2371	2517 - 2660	2806 - 2949	3094 - 3238
Stabilizer gear width F	mm	1000	1400	1400	1600	1800	1800	2000	2000
Step width B 600 mm	<b>Art.-No.</b>	<b>828637</b>	<b>828651</b>	<b>828675</b>	<b>828699</b>	<b>828712</b>	<b>828736</b>	<b>828750</b>	<b>828774</b>
Step width B 800 mm	<b>Art.-No.</b>	<b>828835</b>	<b>828859</b>	<b>828873</b>	<b>828897</b>	<b>828910</b>	<b>828934</b>	<b>828958</b>	<b>828972</b>
Step width B 1000 mm	<b>Art.-No.</b>	<b>829030</b>	<b>829054</b>	<b>829078</b>	<b>829092</b>	<b>829115</b>	<b>829139</b>	<b>829153</b>	<b>829177</b>

### Variant steps execution:

Step width mm		600	800	1000
Step execution, steel grating	<b>Art.-No.</b>	<b>823908*</b>	<b>823915*</b>	<b>823922*</b>
Step execution steel perforated	<b>Art.-No.</b>	<b>823939*</b>	<b>823946*</b>	<b>823953*</b>
* Extra charge per step				

### Platform extension:

Step width mm		600	800	1000
Platform extension, aluminium 225 mm*	<b>Art.-No.</b>	<b>829467</b>	<b>829474</b>	<b>829481</b>
Railing extension, aluminium 225 mm	<b>Art.-No.</b>	<b>829498</b>	<b>829498</b>	<b>829498</b>
*Maximum platform extension 3010 mm				

**On request for special constructions please indicate:**

**Steps**

- Aluminium corrugated (standard)
- Steel grating
- Steel perforated

No. of steps \_\_\_\_\_ pc.

**Dimensions**

Vertical platform height E: \_\_\_\_\_ mm

Work inclination  $\alpha$ : \_\_\_\_\_ °

Step width B: \_\_\_\_\_ mm

Step depth W: \_\_\_\_\_ mm

Platform length A: \_\_\_\_\_ mm


Projection (if work inclination unknown) D: \_\_\_\_\_ mm

Exterior width of stairs including stabilizer gear F: \_\_\_\_\_ mm

**Hand rail / railing:**

- Hand rail left
- Hand rail right
- Platform railing left
- Platform railing right
- Front platform railing
- Platform exit, front
- Platform exit, left
- Platform exit, right

**Other requests:** \_\_\_\_\_  
 \_\_\_\_\_

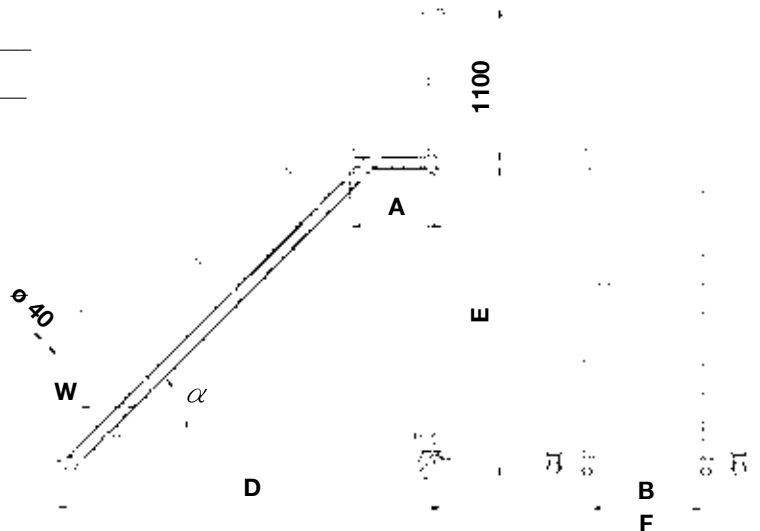

**Important: For inquiries/orders indicate always the vertical height (E)!**