




Double Rung Ladder (Plastic)

- Bilaterally ascendable rung ladder made of 100% glass-fibre reinforced plastic for working at electrical installations
- Profiled, non-slip rungs, from the 3rd until 6th rung from above are 52 mm wide flat rungs and provide safe and fatigue-free working
- UV-resistant and break-proof for a long service life
- Rail ends with replaceable, non-slip, profiled foot caps for safe foothold
- Abrasion-resistant rails prevent dirty hands
- Applications: Refrigerated warehouses, chemical industry, power plants, etc.
- DIN-DS/EN 131

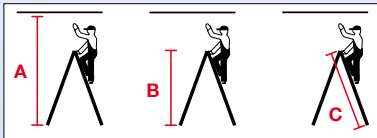

Certificate
EN 131
Norm

Work. height up to ca. m A		2,90	3,40	3,90	4,40	4,90
Vertical height ca. m B		1,19	1,71	2,24	2,77	3,29
Ladder length ca. m C		1,27	1,83	2,39	2,95	3,51
No. of rungs		2x4	2x6	2x8	2x10	2x12
Weight ca. kg		6,5	10,0	12,7	15,7	19,3
Art.-No.		817402	817426	817440	817464	817471



Art.-No. 817440