




Extension Ladder (Plastic)

- Two-piece glass-fibre reinforced plastic rung ladder for working at high working heights
- Fittings and bolts made of stainless steel
- Easy rung-by-rung rail adjustment. The fourth until the sixth rung from above are executed as 52-mm wide, flat rungs and provide safe and fatigue-free working
- The ladder parts may also be used separately
- Rails ends with replaceable, non-slip and profiled foot caps for safe foothold
- Abrasion-resistant rails prevent dirty hands
- Applications: Refrigerated warehouses, chemical industry, power plants, etc.
- DIN-DS/EN 131

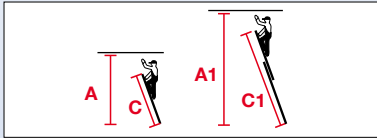

Certificate
EN 131
Norm

Work. height up to ca. m A	3,05	3,65	4,25	4,65	5,25	5,85
Work. height up to ca. m A1	4,20	5,30	6,50	7,40	8,60	9,70
Length, retracted ca. m C	1,93	2,49	3,05	3,61	4,17	4,73
Length, extended. ca. m C1	3,05	4,17	5,29	6,41	7,53	8,65
No. of rungs	2x6	2x8	2x10	2x12	2x14	2x16
Weight ca. kg	10,0	13,0	16,0	21,0	26,0	30,0
Art.-No.	817624	817631	817648	817655	817662	817679



Art.-No. 817631