






**ProTec**  
System

## Mobile Scaffold (Aluminum)


- TÜV/GS approved, max. load 200 kg/m<sup>2</sup> according to EN 1004
- Max. working height 12.30 m (outdoor max. working height 10 m according to EN 1004)
- The working platform with hatch (2.00 x 0.60 m) is vertically adjustable from rung to rung in 25 cm rung increments
- The working platform is made of weatherproof and non-slip phenolic resin pane
- Quick assembly without use of tools thanks to rigid and guided bracing and slip-on modular frame elements
- Braked vertically adjustable castors ensure levelled of uneven ground
- Easy assembled outriggers ensure additional safety at working height above 7.30 m
- The completely assembled mobile scaffold can be moved horizontally on the stabilizer
- Non-slip, profiled rungs of the vertical frames ensure a safe inside climbing
- Optimal stability and resistance provided by high performance stabilizer



**Important:** Depending of the mobile scaffold configuration, ballast weights must be used (accessories). For ballast weight specifications, please refer to the instructions for assembly and use or at our homepage.

### Mobile scaffold configurations:

\* Working height

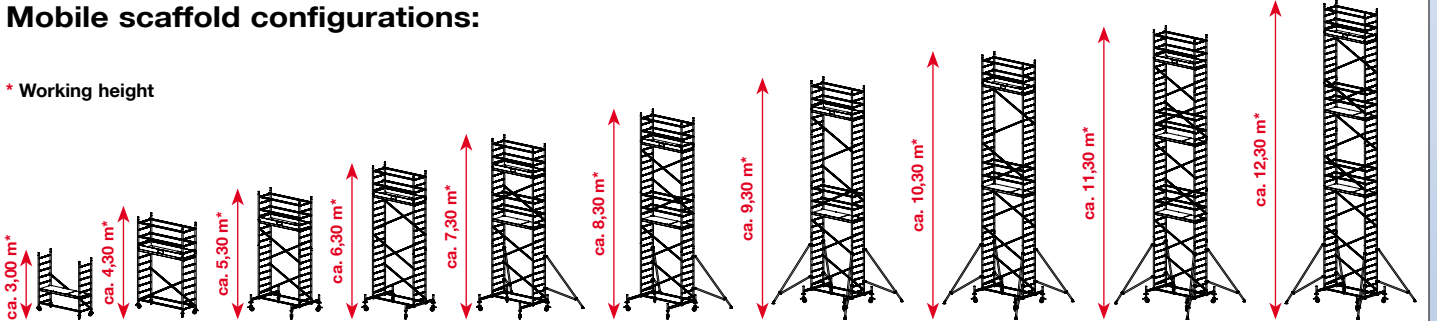

Work. height	ca. m	A	3,00	4,30	5,30	6,30	7,30	8,30	9,30	10,30	11,30	12,30
Standing height	ca. m	B	0,90	2,30	3,30	4,30	5,30	6,30	7,30	8,30	9,30	10,30
Scaffold height	ca. m	C	2,30	3,30	4,30	5,30	6,30	7,30	8,30	9,30	10,30	11,30
<b>Article list:</b>	<b>Art.-No.</b>		<b>910110</b>	<b>910097</b>	<b>910134</b>	<b>910141</b>	<b>910158</b>	<b>910165</b>	<b>910172</b>	<b>910189</b>	<b>910196</b>	<b>910202</b>
Vertical frame 2 m			2	2	3	4	5	6	7	8	9	10
Vertical frame 1 m			-	2	2	2	2	2	2	2	2	2
Platform with hatch 2.00 x 0.60 m			1	1	1	1	2	2	2	2	3	3
Diagonal brace			1	2	4	6	6	8	8	10	12	14
Rail brace			1	6	4	4	8	8	8	8	12	12
Base brace			-	-	2	2	2	2	2	2	2	2
Stabilizer			-	-	2	2	2	2	2	2	2	2
Outrigger			-	-	-	-	2	2	4	4	4	4
Transversal board			-	2	2	2	2	2	2	2	2	2
Longitudinal board			-	2	2	2	2	2	2	2	2	2
Set of casters ø 150 mm vertically adjustable			1	1	1	1	1	1	1	1	1	1
Foot plate			4	4	4	4	4	4	4	4	4	4
Gravity pin			4	8	14	16	18	20	22	24	26	28
Total weight	ca. kg		43,0	65,0	95,0	103,0	142,0	151,0	172,0	181,0	207,0	216,0

Accessories / Spare parts:	Art.-No.	Accessories / Spare parts:	Art.-No.
Ballast weight 10 kg	704306	Stabilizer set 1.20 m	910059
Safety set rail brace / diagonal brace M5 x 60 mm	718860	Stabilizer set 1.50 m	910066
Safety set platform M5 x 90 mm	718853	Caster ø 150 mm vertically adjustable (piece)	914101