



## Shaft Ladders

- Made of hot-galvanized steel or stainless steel V4A, pickled and passivated
- Type is certified in accordance with EN 14396
- In compliance with the requirements of accident prevention regulations, BGV D 36 / GUV-V D 36
- Clear width 300 mm / 400 mm
- Rectangular tube rails 50 x 20 mm, non-slip perforated rungs
- Shaft ladders made of glass-fibre reinforced plastic are available on request

## Shaft Ladders, galvanized steel

Number of rungs	Length ca. m	Outside width mm	Clear width mm	Art. - No.	Outside width mm	Clear width mm	Art. - No.
4	1,12	340	300	815798	440	400	815910
5	1,40	340	300	815804	440	400	815927
6	1,68	340	300	815811	440	400	815934
7	1,96	340	300	815828	440	400	815941
8	2,24	340	300	815835	440	400	815958
9	2,52	340	300	815842	440	400	815965
10	2,80	340	300	815859	440	400	815972
11	3,08	340	300	815866	440	400	815989
12	3,36	340	300	815873	440	400	815996
13	3,64	340	300	815880	440	400	816009
14	3,92	340	300	815897	440	400	816016
15	4,20	340	300	815903	440	400	816023

## Shaft Ladders, stainless steel V4A (1.4571)

Number of rungs	Length ca. m	Outside width mm	Clear width mm	Art. - No.	Outside width mm	Clear width mm	Art. - No.
4	1,12	340	300	816030	440	400	816153
5	1,40	340	300	816047	440	400	816160
6	1,68	340	300	816054	440	400	816177
7	1,96	340	300	816061	440	400	816184
8	2,24	340	300	816078	440	400	816191
9	2,52	340	300	816085	440	400	816207
10	2,80	340	300	816092	440	400	816214
11	3,08	340	300	816108	440	400	816221
12	3,36	340	300	816115	440	400	816238
13	3,64	340	300	816122	440	400	816245
14	3,92	340	300	816139	440	400	816252
15	4,20	340	300	816146	440	400	816269

## Accessories for Shaft Ladders






Fastening material for shaft ladders	Art.-No.
Foot plate, V4A (st.)	816917
Ladder extension joints, V4A, (set)	816283
Wall anchor, standard, 150 mm, galvanized steel, (pc.)	816306
Wall anchor, adjustable 150 - 200 mm, galvanized steel, (pc.)	816313
Wall anchor, adjustable 200-250 mm, galvanized steel, (pc.)	816320
Wall anchor, adjustable 280-330 mm, galvanized steel, (pc.)	816337
Wall anchor, adjustable, 360-410 mm, galvanized steel, (pc.)	816344
Wall anchor, standard 150 mm, V4A, (pc.)	816351
Wall anchor, adjustable, 150-200 mm, V4A, (pc.)	816368
Wall anchor, adjustable, 200-250 mm, V4A, (pc.)	816375
Wall anchor, adjustable, 280-330 mm, V4A, (pc.)	816382
Wall anchor, adjustable, 360-410 mm, V4A, (pc.)	816399

Note: In case of adjustable wall anchors, the shaft ladder must be fixed to the floor with the aid of foot plates (Art. No. 816917). If this is not possible due to structural reasons, each wall anchor must be equipped with an additional brace (available on request).



Art.-No. 815828

### Accessories: Wall anchor

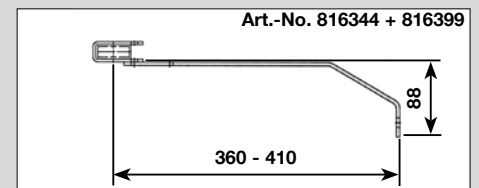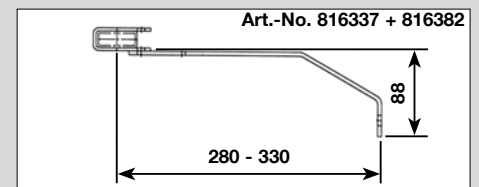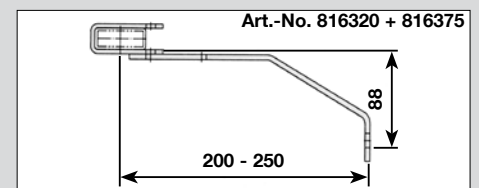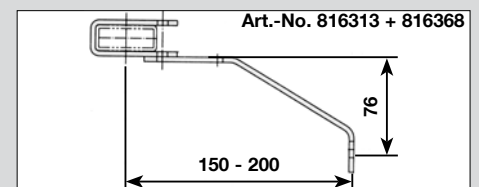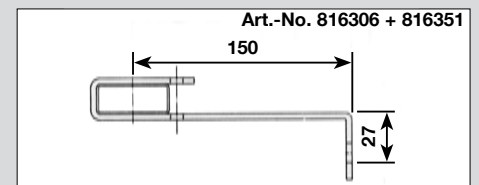

Note: For ladders with 4 – 9 rungs, 2 sets of wall anchors, for ladders with 10-15 rungs, 3 sets of wall anchors, for ladders with 16-24 rungs, 5 sets of wall anchors are required.  
1 set = 2 pieces (right/left)