




Sibilo®

Leaning Ladder

- One-piece aluminum rung ladder with versatile use
- 16-fold bracing of the rung/rail joints ensures maximum stability and long service life
- Completely profiled rungs for safe ascent and descent
- Non-slip, 2-component footcaps: The hard component ensures a strong connection of the cap with the rail; the soft component provides a strong surface stiction and prevents slipping of the ladder
- Light weight ensures easy transport


For the **CombiSystem** (Safety Accessories) and other accessories refer to page 112.

Suitable for this ladder: **CombiSystem** 1, 2, 3, 4, 5, 6, 8

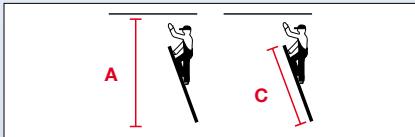

Certificate
EN 131
Norm

Work. height up to ca. m A	3,10	3,90	4,70	5,50	6,35	
Ladder length ca. m C	1,85	2,70	3,55	4,40	5,20	
No. of rungs	6	9	12	15	18	
Weight ca. kg	3,1	4,5	5,9	7,3	8,7	
Transport dimensions	Length ca. m	1,86	2,70	3,55	4,40	5,22
	Width ca. m	0,35	0,35	0,35	0,35	0,35
	Height ca. m	0,07	0,07	0,07	0,07	0,07
Art.-No.	121387	120519	120526	120533	121813	



Art.-No. 121519