





STABILO®

Hinged Double Ladder


- Two-piece hinged aluminum rung ladder; can be used as double-standing or leaning ladder
- The patented KRAUSE safety lock hinge system with one-hand release bar ensures the quick and safe ladder functioning through the simultaneously unlocking of the hinges with only one hand
- Completely profiled large dimensioned rungs for safe ascent and descent
- The extruded aluminum rails are additionally reinforced at high-stress points for high profile stiffness and edge protection
- High stability through wide horizontal stabilizer bars



For the **CombiSystem** (Safety Accessories) and other accessories refer to page 112. Suitable for this ladder: **CombiSystem** 1, 2, 3, 4, 5, 6, 8

Work. height up to ca. m A	3,30	3,85
Work. height up to ca. m A1	4,70	5,75
Length trestle ca. m B	1,75	2,30
Length, leaning lad. ca. m C	3,60	4,70
No. of rungs	2x6	2x8
Weight ca. kg	8,6	10,5
Transport dimensions	Length ca. m	1,84
	Width ca. m	0,36
	Height ca. m	0,14
Art. -No.	123534	123541

Certificate
EN 131
Norm

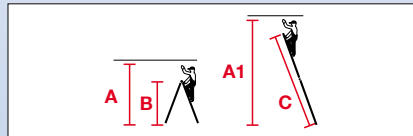

Art.-No. 123541

Accessories:
Power
discharging foot
caps, see
page 113