





STABILO®


Hinged Multipurpose Ladder

- Four-piece aluminum hinged ladder with universal use: Can be used as leaning ladder, double standing ladder and work platform (only possible with model with 4x3 rungs)
- The patented KRAUSE safety lock hinge system with one-hand release bar ensures the quick and safe ladder functioning through the simultaneously unlocking of the hinges with only one hand
- Can be quickly and easily stored; fits into the boot of the car
- The extruded aluminum rails are additionally reinforced at high-stress points for high profile stiffness and edge protection
- Completely serrated rungs for safe ascent and descent
- Wide-span horizontal stabilizer bar with 2-component foot caps enlarges the standing area
- Non-slip, 2-component footcaps: The hard component ensures a strong connection of the cap with the rail; the soft component provides a strong surface stiction and prevents slipping of the ladder



Accessories:
Power
discharging foot
caps, see
page 113

Art.-No. 123510

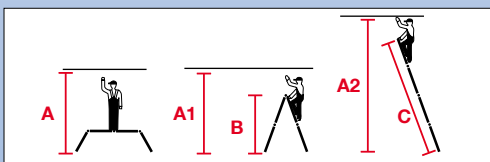

For the CombiSystem (Safety Accessories) and other accessories refer to page 112. Suitable for this ladder: **CombiSystem** 1, 2, 3, 4, 6, 7, 8

| | | |
|-------------------------------------|--------------|--------|
| Work. height up to ca. m A | 3,00 | - |
| Work. height up to ca. m A1 | 3,30 | 3,85 |
| Work. height up to ca. m A2 | 4,70 | 5,75 |
| Length trestle ca. m B | 1,75 | 2,30 |
| Length, leaning lad. ca. m C | 3,60 | 4,70 |
| No. of rungs | 4x3 | 4x4 |
| Weight ca. kg | 13,5 | 15,5 |
| Transport dimensions | Length ca. m | 1,00 |
| | Width ca. m | 0,37 |
| | Height ca. m | 0,27 |
| Art.-No. | 123510 | 123503 |

Certificate
EN 131
Norm

