




STABILO®

Rope Operated Two-Piece Extension Ladder


- Two-piece aluminum rung ladder for working at high working heights
- The interior rotary rope run prevents the rope from threading and becoming dirty during use and transport
- Self-locking hooks from rung to rung prevent the accidental sliding-down of the upper ladder part
- Guides and fittings made of high-alloy aluminium or galvanized steel
- Wall castors protect wall during extension or retraction of ladder
- Non-slip, 2-component footcaps: The hard component ensures a strong connection of the cap with the rail; the soft component provides a strong surface stiction and prevents slipping of the ladder



Certificate
EN 131
Norm

Work. height up to ca. m A	5,50	6,35	6,90	8,05	
Work. height up to ca. m A1	8,75	10,10	11,55	13,70	
Length retracted ca. m C	4,35	5,20	5,80	6,90	
Length extended ca. m C1	7,70	9,10	10,55	12,70	
No. of rungs	2x15	2x18	2x20	2x24	
Weight ca. kg	20,0	26,0	34,5	41,0	
Transport dimensions	Length ca. m	4,36	5,20	5,80	6,90
	Width ca. m	0,44	0,44	0,47	0,47
	Height ca. m	0,15	0,18	0,20	0,20
Art. -No.	123411	123428	800701	800749	

For the **GombiSystem** (Safety Accessories) and other accessories refer to page 112.
Suitable for this ladder:
GombiSystem 1, 2, 3, 4, 5, 6, 8

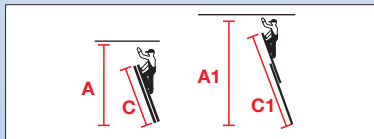

Accessories:
Power
discharging foot
caps, see
page 113

Art.-No. 123428