




**STABILO®**


## Step Ladder for Double Shelves Circular Tube Rail System

- Aluminum step shelf ladder with integrated top guide rail system for double shelves, rotatable
- Due to clamping joints of the T-rail holders, drilling into the fastening rail is not necessary (please provide dimensions of fastening rail in your enquiry)
- Solid braced step-/rail joints with 80 mm deep, profiled steps ensure safe ascent and comfortable standing
- Two running gears at the upper end with brake and friction bearing rolls
- Maximum width of aisle: 1.60 m
- Width variations of up to 2 cm are compensated by the running gears
- Handrail and holding bar available as accessories (page 44)

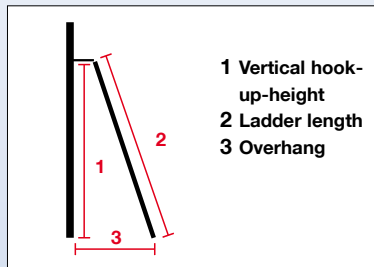

In your order, please provide the exact vertical height: Floor to lower edge of shelf stabilizer as well as aisle width and length.

Working height ca. m		2,95	3,17	3,40	3,63	3,87	4,10	4,33	4,57	4,80
Rail height	m 1	2,21	2,45	2,68	2,91	3,15	3,38	3,62	3,85	4,08
Ladder length, retracted	m 2	2,05	2,30	2,55	2,80	3,05	3,30	3,55	3,80	4,05
Overhang	m 3	0,87	0,96	1,05	1,14	1,23	1,32	1,41	1,50	1,60
No. of steps		5	6	7	8	9	10	11	12	13
Weight	ca. kg	24,1	24,6	25,1	25,6	26,1	26,6	27,1	27,6	28,1
Art.-No.		819406	819413	819420	819437	819444	819451	819468	819475	819482

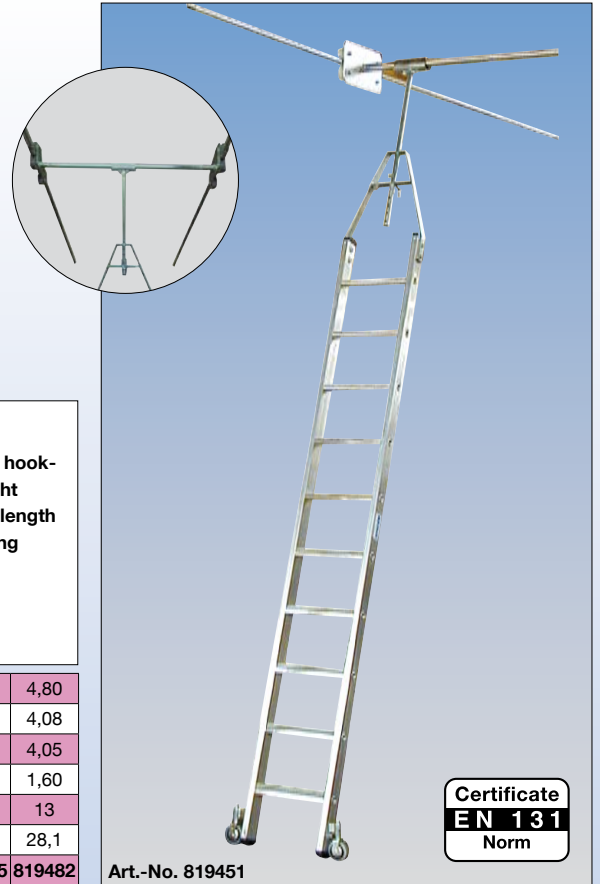

Certificate  
**EN 131**  
Norm

Art.-No. 819451