



Stairs with Platform, mobile (Light Metall)

- Stable mobile aluminium stairs, the safe and mobile working appliance for all areas of application, according the regulations of EN ISO 14122
- Width of steps: 600 - 800 - 1000 mm
- Depth of steps: 215 mm by 45° and 175 mm by 60° inclination
- Aluminium grating / perforated steps on request
- Standard depth of platform: 645 mm, extension and widening on request available
- Delivery with hand rail on both sides and all around 1100 mm high platform railing with knee and foot rail
- Hand rails are equipped with a knee rail by stairs with inclination of 45°
- 2 guide casters ø 125 mm with parking brakes at the ascending part and 2 casters ø 160 mm with parking brakes at the supporting part
- Stable stabilizer gear at the supporting part
- Delivery in pre-assembled component groups
- Stairs with other inclinations, step width and surface as special constructions on request available

Inclination 45°

No. of steps		4	6	8	10	12	14	16	18
Vertical height E	mm	800	1200	1600	2000	2400	2800	3200	3600
Projection D	mm	1455	1855	2255	2655	3055	3455	3855	4255
Width of stabilizer gear F	mm	1000	1000	1400	1400	1600	1600	1800	1800
Step width B 600 mm	Art.-No.	827838	827852	827876	827890	827913	827937	827951	827975
Step width B 800 mm	Art.-No.	828033	828057	828071	828095	828118	828132	828156	828170
Step width B 1000 mm	Art.-No.	828231	828255	828279	828293	828316	828330	828354	828378

Inclination 60°

No. of steps		4	6	8	10	12	14	16	18
Vertical height E	mm	980	1470	1960	2450	2940	3430	3920	4410
Projection D	mm	1191	1474	1757	2040	2322	2605	2888	3171
Width of stabilizer gear F	mm	1000	1400	1400	1600	1800	1800	2000	2000
Step width B 600 mm	Art.-No.	828637	828651	828675	828699	828712	828736	828750	828774
Step width B 800 mm	Art.-No.	828835	828859	828873	828897	828910	828934	828958	828972
Step width B 1000 mm	Art.-No.	829030	829054	829078	829092	829115	829139	829153	829177

Variant steps execution:

Step width mm		600	800	1000
Step execution, steel grating	Art.-No.	823908*	823915*	823922*
Step execution steel perforated	Art.-No.	823939*	823946*	823953*
* Extra charge per step				

Platform extension:

Step width mm		600	800	1000
Platform extension, aluminium 215 mm*	Art.-No.	829467	829474	829481
Railing extension, aluminium 215 mm	Art.-No.	829498	829498	829498
*Maximum platform extension 3010 mm				



On request for special constructions please indicate:

Steps

Aluminium corrugated (standard)

Steel grating

Steel perforated

No. of steps _____ pc.

Dimensions

Vertical platform height E: _____ mm

Work inclination : _____ °

Step width B: _____ mm

Step depth W: _____ mm

Platform length A: _____ mm

Projection (if work inclination unknown) D: _____ mm

Exterior width of stairs including stabilizer gear F: _____ mm

Hand rail / railing:

Hand rail left

Hand rail right

Platform railing left

Platform railing right


Front platform railing

Platform exit, front

Platform exit, left

Platform exit, right

Other requests: _____

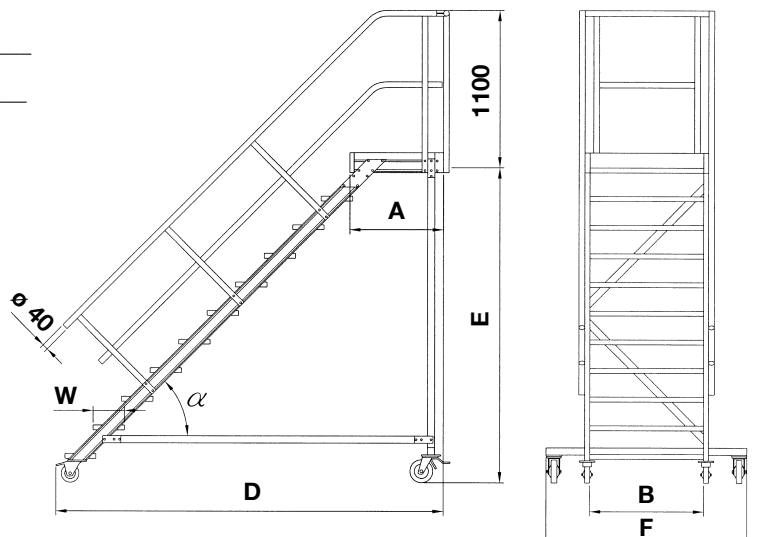

Important: For inquiries/orders indicate always the vertical height (E)!