






# TeleMatic®

## Hinged Telescopic Ladder

- 4-section hinged telescopic aluminum ladder: Can be used as double standing ladder, leaning ladder or as two separate double standing ladders
- Due to the telescopic rung-to-rung displacement of the outer ladder parts, the ladder adapts to completely different local conditions
- The patented ClickMaticSystem (locking device) can be used quickly and easy
- With a few adjustments, the inner and outer ladder parts can be converted into two separate double standing ladder which, equipped with a plank, can then be used as working table or trestle (Note: For this set-up, Combi stabilizer, Art.-No. 121417, must be used as lower enlargement of the inner ladder)
- Non-slip, 2-component footcaps: The hard component ensures a strong connection of the cap with the rail; the soft component provides a strong surface stiction and prevents slipping of the ladder
- Additional stability through corner braces
- Can be quickly and easily stored; fits into the boot of the car



Art.-No. 122315

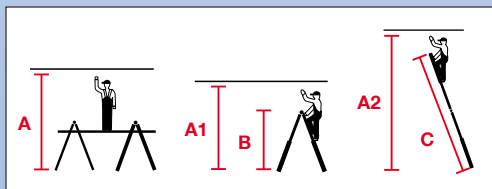

For the **CombiSystem** (Safety Accessories) and other accessories refer to page 112.  
 Suitable for this ladder:  
**CombiSystem 1, 2, 3, 4, 5, 6, 8**

Work. height up to ca. m <b>A</b>	3,00	3,00
Work. height up to ca. m <b>A1</b>	3,60	4,15
Work. height up to ca. m <b>A2</b>	5,25	6,35
Height trestle ca. m <b>B</b>	2,05	2,55
Length lean. ladder ca. m <b>C</b>	4,20	5,30
No. of rungs	4x4	4x5
Weight ca. kg	14,0	16,0
Transport dimensions	Length ca. m	1,35
	Width ca. m	0,69
	Height ca. m	0,20
Art. -No.	122315	122322

