



Tribilo®

Multipurpose Ladder


- Versatile three-piece aluminum rung ladder: Usable as leaning, free-standing and extension ladder
- Sturdy steel guiding profiles enable the convenient extension of the ladder
- Completely profiled rungs for safe ascent and descent
- Wide-span horizontal stabilizer bar with 2-component foot caps enlarges the standing area
- Non-slip, 2-component footcaps: The hard component ensures a strong connection of the cap with the rail; the soft component provides a strong surface stiction and prevents slipping of the ladder
- Self-locking hooks prevent the unintentional detachment during use and transport
- Weatherproof safety straps prevent the unintentional detachment of the ladder parts during use



Art.-No. 120601



Certificate
EN 131
Norm

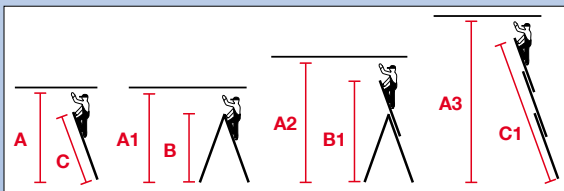

For the **CombiSystem** (Safety Accessories) and other accessories refer to page 112. Suitable for this ladder: **CombiSystem 1, 2, 3, 4, 5, 6, 8**

Work. height up to ca. m A	3,90	4,15	4,70	5,25
Work. height up to ca. m A1	4,15	4,40	4,95	5,45
Work. height up to ca. m A2	4,95	5,45	6,55	7,60
Work. height up to ca. m A3	7,10	7,95	9,55	11,20
Ladder height ca. m B	2,60	2,85	3,40	3,90
Ladder height ca. m B1	4,20	4,70	5,80	6,85
Ladder length ca. m C	2,70	3,00	3,55	4,10
Ladder length ca. m C1	6,05	6,90	8,60	10,25
No. of rungs	3x9	3x10	3x12	3x14
Weight ca. kg	16,8	18,4	25,8	30,0
Transport dimensions	Length ca. m	2,70	3,00	3,55
	Width ca. m	0,48	0,48	0,48
	Height ca. m	0,19	0,19	0,23
Art.-No.	120601	120618	120625	120717

