




TriMatic®

Hinged Double Ladder


- Hinged two-piece aluminum ladder usable as double standing ladder and as leaning ladder
- The patented KRAUSE safety lock hinge system with one-hand release bar ensures the quick and safe ladder functioning through the simultaneously unlocking of a hinge pair with one hand
- Completely profiled rungs for safe ascent and descent
- Wide-span horizontal stabilizer bar with 2-component foot caps enlarges the standing area
- Non-slip, 2-component footcaps: The hard component ensures a strong connection of the cap with the rail; the soft component provides a strong surface stiction and prevents slipping of the ladder



Work. height up to ca. m A	3,30	3,85
Work. height up to ca. m A1	4,70	5,75
Height trestle ca. m B	1,75	2,30
Length lean. ladder ca. m C	3,60	4,70
No. of rungs	2x6	2x8
Weight ca. kg	8,6	10,5
Transport dimensions	Length ca. m	1,84
	Width ca. m	0,36
	Height ca. m	0,14
Art.-No.	121325	121332

Certificate
EN 131
Norm

For the **CombiSystem** (Safety Accessories) and other accessories refer to page 112. Suitable for this ladder: **CombiSystem 1, 2, 3, 4, 5, 6, 8**

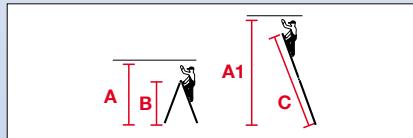

Art.-No. 121325