



## Ladders and scaffold systems



## Platform ladders

for safe and comfortable working



**NEW**

# Highlights ...

## ... of the new platform ladders at a glance

KRAUSE **Connect-System** for stable handrail fastening without disturbing connectors

Three-sided platform railing, 1.0 m high, with integrated reinforced knee rails (double-sided platform ladder with two-sided platform railing)

Ergonomic, stepless transition between handrail and platform railing

Aluminium corrugated

Platform size: 600 x 700 mm

R13

Platform size: 600 x 720 mm

Handrail optional available

Extra high toeboard (100 % higher than required by standard)

R13

Step depth: 180 mm

Available in 2 executions:

Profiled grating R13

Aluminium corrugated

4 swivel castors Ø 125 mm that lock under load, 2 with locking devices

Small stand width

Step depth: 175 mm

Aluminium corrugated



# The advantages ...

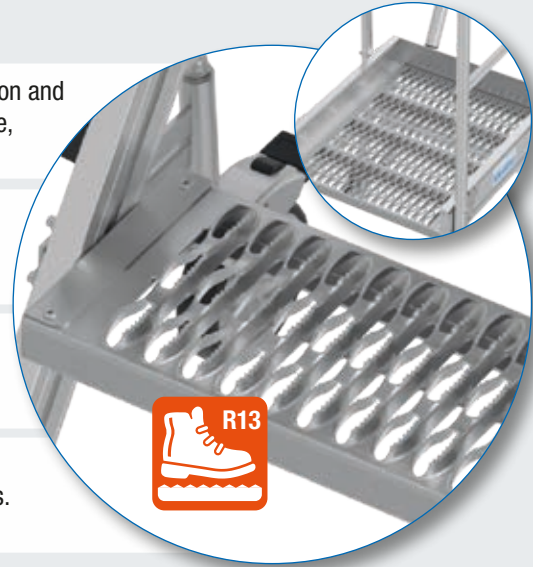
## ... of the R13 steps and platform with open hole pattern

R13 is the slip resistance class with the highest static coefficient of friction and offers very high slip resistance - even under demanding conditions where, for example, large amounts of grease and oil are present.

Use indoors and outdoors is possible even with very dirty or slippery surfaces such as water, snow, ice, oil, grease, dust, granules, etc.

High slip resistance, as the steps clean themselves when stepped on; impurities such as dirt, mud or ice fall through the holes.

The steps and platform are made entirely of aluminium and are not subject to attrition as is the case with steps with rubber or plastic inserts.



## Accessories ...



### Transition barrier

- + Self-locking transition barrier for complete protection of the workplace
- + Secures the stair area against falling down
- + Can be used for retrofitting of existing KRAUSE platform ladders or comparable 40 mm round tube profiles
- + Dimensions (W x H): 640 x 530 mm



### Tool tray with clamb function

- + Fixture to 40 mm round tube by two connectors with thumb nut
- + Suitable for all KRAUSE platform ladders, special constructions and railing systems
- + Tools and materials are located where they are required
- + Fast and toolless change to new position
- + Rubber inserts against slipping of tools and materials
- + Dimensions: 500 x 300 x 100 mm



### Handrail

- + From a platform height of 1.0 m, handrails are required on both sides according to DIN EN 131-7
- + Handrails have to be ordered as accessories
- + Available in 3 versions for all platform ladder sizes starting with 3 steps

# Platform ladder

mobile, single-sided (according to EN 131-7)



Illustration shows:  
Art.-No. 821041 and Art.-No. 821515 (2x)

**STABILO®**  
Professional



Mobile, single-sided aluminium platform ladder with deep steps and large platform for safe and comfortable working.

- + Mobile aluminium platform ladder, single-sided access, with **175 mm** deep slip-resistant steps and large platform incl. all-round platform railing for safe and comfortable working
- + Narrow shaped, ideal for working close to shelves
- + Platform size **600 x 700 mm**, aluminium corrugated
- + Three-sided platform railing, 1.0 m high, Ø 40 mm, with integrated reinforced knee rails
- + KRAUSE Connect-System for stable handrail fastening without disturbing connectors
- + Stepless transition from the platform railing to the separately available stair handrails - no need to reach from stair handrail to platform railing handrail and vice versa
- + 100 mm high toeboard for increased safety (100 % higher than required by standard EN 131-7)
- + 4 swivel castors Ø 125 mm, 2 are equipped with locking devices, ensure comfortable movement and prevent unintentional rolling away when entering the stair
- + Delivered in pre-assembled modules for easy and quick assembly

## Accessories

- + From a platform height of 1.0 m, **handrails** are required on both sides according to DIN EN 131-7. Handrails must be ordered as required accessories
- + Self-closing **transition barrier** (Art.-No. 821492)
- + Practical, clampable **tool tray** (Art.-No. 210852) for safe storage of tools or materials



Number of steps incl. platform				2	3	4	5	6	7	8			
1		A up to approx.	m	2.50	2.75	3.00	3.20	3.45	3.70	3.95			
		B approx.	m	0.50	0.75	1.00	1.20	1.45	1.70	1.95			
2		C approx.	m	1.50	1.75	2.00	2.20	2.45	2.70	2.95			
Floor area B x L approx.			m	0.75 x 0.95	0.80 x 1.15	0.85 x 1.35	0.90 x 1.50	0.90 x 1.70	0.95 x 1.90	1.00 x 2.05			
Product weight platform ladder approx.			kg	29.2	32.2	35.7	39.0	42.3	53.9	65.4			
Art.-No.				821003	821010	821027	821034	821041	821058	821065			
Handrail (suitable on both sides)													
Number of steps incl. platform				2	3	4	5	6	7	8			
Art.-No. Handrail					821508		821515		821522				
Product weight per handrail			kg	–		1.1		1.5		1.8			
Spare parts (Please mind in case of an order the braked/unbraked execution.)													
Per piece	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Foot plug		
For size	2 + 3 steps		4 steps		5 steps		6 steps		7 steps			8 steps	
Art.-No.	820488	820495	820501	820518	820587	820594	820525	820532	820549	820556	820563	820570	211231



## STABILO<sup>®</sup> Professional

Mobile, single-sided aluminium platform ladder with deep steps and large platform made of profiled grating with R13 slip resistance for safe and comfortable working.

- + Mobile aluminium platform ladder, single-sided access, with **180 mm** deep steps and large platform made of profiled grating with R13 slip resistance incl. all-round platform railing for safe and comfortable working
- + Narrow shaped, ideal for working close to shelves
- + Platform size **600 x 720 mm**, profiled grating with R13 slip resistance
- + Three-sided platform railing, 1.0 m high, Ø 40 mm, with integrated reinforced knee rails
- + KRAUSE Connect-System for stable handrail fastening without disturbing connectors
- + Stepless transition from the platform railing to the separately available stair handrails - no need to reach from stair handrail to platform railing handrail and vice versa
- + 100 mm high toeboard for increased safety (100 % higher than required by standard EN 131-7)
- + 4 swivel castors Ø 125 mm, 2 are equipped with locking devices, ensure comfortable movement and prevent unintentional rolling away when entering the stair
- + Delivered in pre-assembled modules for easy and quick assembly

### Accessories

- + From a platform height of 1.0 m, **handrails** are required on both sides according to DIN EN 131-7. Handrails must be ordered as required accessories
- + Self-closing **transition barrier** (Art.-No. 821492)
- + Practical, clampable **tool tray** (Art.-No. 210852) for safe storage of tools or materials



## Platform ladder



mobile, single-sided, profiled grating with R13

(according to EN 131-7)



Illustration shows:

Art.-No. 821287 and Art.-No. 821515 (2x)

Number of steps incl. platform			2		3		4		5		6		7		8	
1		A up to approx.	m	2.50	2.75	3.00	3.20	3.45	3.70	3.95						
		B approx.	m	0.50	0.75	1.00	1.20	1.45	1.70	1.95						
2		C approx.	m	1.50	1.75	2.00	2.20	2.45	2.70	2.95						
Floor area B x L approx.			m	0.75 x 0.95	0.80 x 1.15	0.85 x 1.35	0.90 x 1.50	0.90 x 1.70	0.95 x 1.90	1.00 x 2.05						
Product weight platform ladder approx.			kg	29.0	32.0	35.5	38.7	42.0	53.5	65.2						
Art.-No.				820983	821256	821263	821270	821287	821294	821300						
Handrail (suitable on both sides)																
Number of steps incl. platform				2	3	4	5	6	7	8						
Art.-No. Handrail					821508		821515		821522							
Product weight per handrail			kg	–	1.1		1.5		1.8							
Spare parts (Please mind in case of an order the braked/unbraked execution.)																
Per piece	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Foot plug					
For size	2 + 3 steps		4 steps		5 steps		6 steps		7 steps		8 steps	–				
Art.-No.	820488	820495	820501	820518	820587	820594	820525	820532	820549	820556	820563	820570	211231			

# Platform ladder

mobile, double-sided (according to EN 131-7)

**NEW**



Illustration shows:

Art.-No. 821096 and Art.-No. 821515 (4x)

**STABILO®**  
Professional



Mobile, double-sided aluminium platform ladder with deep steps and large platform for safe and comfortable working.

- + Mobile aluminium platform ladder, double-sided access, with **175 mm** deep slip-resistant steps and large platform incl. platform railing for safe and comfortable working
- + Narrow shaped, ideal for working close to shelves
- + Platform size **600 x 700 mm**, aluminium corrugated
- + Two-sided platform railing, 1.0 m high, Ø 40 mm, with integrated reinforced knee rails
- + KRAUSE Connect-System for stable handrail fastening without disturbing connectors
- + Stepless transition from the platform railing to the separately available stair handrails - no need to reach from stair handrail to platform railing handrail and vice versa
- + 100 mm high toeboard for increased safety (100 % higher than required by standard EN 131-7)
- + 4 swivel castors Ø 125 mm, 2 are equipped with locking devices, ensure comfortable movement and prevent unintentional rolling away when entering the stair
- + Delivered in pre-assembled modules for easy and quick assembly

## Accessories

- + From a platform height of 1.0 m, **handrails** are required on both sides according to DIN EN 131-7. Handrails must be ordered as required accessories
- + Self-closing **transition barrier** (Art.-No. 821492)
- + Practical, clampable **tool tray** (Art.-No. 210852) for safe storage of tools or materials



Number of steps incl. platform				2 x 3	2 x 4	2 x 5	2 x 6	2 x 7	2 x 8
1		A up to approx.	m	2.75	3.00	3.20	3.45	3.70	3.95
		B approx.	m	0.75	1.00	1.20	1.45	1.70	1.95
2		C approx.	m	1.75	2.00	2.20	2.45	2.70	2.95
Floor area B x L approx.			m	0.80 x 1.40	0.85 x 1.70	0.90 x 1.95	0.90 x 2.25	0.95 x 2.50	1.00 x 2.80
Product weight platform ladder approx.			kg	34.9	40.5	46.0	51.6	57.8	63.8
Art.-No.				821072	821089	821096	821102	821119	821126

Handrail (suitable on both sides)								
Number of steps incl. platform			3	4	5	6	7	8
Art.-No. Handrail			821508		821515		821522	
Product weight per handrail			kg	1,1		1,5		1,8

Spare parts (Please mind in case of an order the braked/unbraked execution.)													
Per piece	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Foot plug
For size	3 steps		4 steps		5 steps		6 steps		7 steps		8 steps		–
Art.-No.	820488	820495	820501	820518	820587	820594	820525	820532	820549	820556	820563	820570	211231



## STABILO<sup>®</sup> Professional

Mobile, double-sided aluminium platform ladder with deep steps and large platform made of profiled grating with R13 slip resistance for safe and comfortable working.

- + Mobile aluminium platform ladder, double-sided access, with **180 mm** deep steps and large platform made of profiled grating with R13 slip resistance incl. platform railing for safe and comfortable working
- + Narrow shaped, ideal for working close to shelves
- + Platform size **600 x 720 mm**, profiled grating with R13 slip resistance
- + Two-sided platform railing, 1.0 m high, Ø 40 mm, with integrated reinforced knee rails
- + KRAUSE Connect-System for stable handrail fastening without disturbing connectors
- + Stepless transition from the platform railing to the separately available stair handrails - no need to reach from stair handrail to platform railing handrail and vice versa
- + 100 mm high toeboard for increased safety (100 % higher than required by standard EN 131-7)
- + 4 swivel castors Ø 125 mm, 2 are equipped with locking devices, ensure comfortable movement and prevent unintentional rolling away when entering the stair
- + Delivered in pre-assembled modules for easy and quick assembly

### Accessories

- + From a platform height of 1.0 m, **handrails** are required on both sides according to DIN EN 131-7. Handrails must be ordered as required accessories
- + Self-closing **transition barrier** (Art.-No. 821492)
- + Practical, clampable **tool tray** (Art.-No. 210852) for safe storage of tools or materials



## Platform ladder

mobile, double-sided, profiled grating with R13

(according to EN 131-7)





**NEW**



Illustration shows:

Art.-No. 821331 and Art.-No. 821515 (4x)

Number of steps incl. platform				2 x 3	2 x 4	2 x 5	2 x 6	2 x 7	2 x 8
1		A up to approx.	m	2.75	3.00	3.20	3.45	3.70	3.95
		B approx.	m	0.75	1.00	1.20	1.45	1.70	1.95
2		C approx.	m	1.75	2.00	2.20	2.45	2.70	2.95
Floor area B x L approx.			m	0.80 x 1.40	0.85 x 1.70	0.90 x 1.95	0.90 x 2.25	0.95 x 2.50	1.00 x 2.80
Product weight platform ladder approx.			kg	34.7	40.2	45.6	51.1	57.2	63.4
Art.-No.				821317	821324	821331	821348	821355	821362

Handrail (suitable on both sides)								
Number of steps incl. platform			3	4	5	6	7	8
Art.-No. Handrail			821508			821515		821522
Product weight per handrail			kg	1,1		1,5		1,8

Spare parts (Please mind in case of an order the braked/unbraked execution.)													
Per piece	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Castor Ø 125 mm, unbraked	Castor Ø 125 mm with arrestor	Foot plug
For size	3 steps		4 steps		5 steps		6 steps		7 steps		8 steps		–
Art.-No.	820488	820495	820501	820518	820587	820594	820525	820532	820549	820556	820563	820570	211231



# Ladders and scaffold systems



**KRAUSE-Werk GmbH & Co. KG**  
Am Kreuzweg 3  
D-36304 Alsfeld  
Tel.: +49 (0) 6631 795-0  
Fax: +49 (0) 6631 795-139  
E-Mail: [info@krause-systems.de](mailto:info@krause-systems.de)



**KRAUSE-Systems AG**  
Chrümble 9  
CH-5623 Boswil  
Tel.: +41 (0) 56 666 90 50  
E-Mail: [info@krause-systems.ch](mailto:info@krause-systems.ch)



**KRAUSE Kft.**  
H-2030 Érd  
Tolmács u. 7.  
Tel.: +36 (06) 23 521 130  
Fax: +36 (06) 23 521 132  
E-Mail: [info@krause-systems.hu](mailto:info@krause-systems.hu)



**KRAUSE Sp. z o. o.**  
ul. Stalowa 10  
PL - 58-100 Świdnica  
Tel.: +48 (74) 851 88 00  
Fax: +48 (74) 851 88 22  
E-Mail: [info@krause-systems.pl](mailto:info@krause-systems.pl)



**ТОО „КРАУЗЕ-СИСТЕМС“**  
KZ-010000, г. Астана  
шоссе Коргалжын 19,  
БЦ „Korgalzhyn“, офис 404 А  
Тел +7 (7172) 57 67 98  
E-Mail: [info@krause-systems.com.kz](mailto:info@krause-systems.com.kz)

Please visit our website:  
**[www.krause-systems.com](http://www.krause-systems.com)**

