i Depending on the configurations additional ballast weights are required (sold separately as accessories). Please see the assembly instructions on our website www.krause-systems.co.uk.

ClimTec® System

Aluminium working scaffold

The aluminium working scaffold for flexible and quick indoor and outdoor use.

+ TÜV-approved, suitable for a max. load of 200 kg/m² in accordance with DIN EN 1004-1
+ The safe construction is ensured due to the fixation of the rail frame GuardMatic-System® before the next higher platform will be assembled. When climbing through the next platform a complete railing and therefore a fall protection is available
+ The integration of the diagonal braces into the GuardMatic-System® guarantees an easy and safe assembly. For transport or storage the rail frame GuardMatic-System® can be folded space-saving
+ The innovative structure of the diagonal braces ensures maximum floor space on the platform and disturbs in no way
+ The 6-point fixation of the GuardMatic-System® provides a maximum of safety in the height
+ Each package is equipped with a platform so that a maximum platform distance of 2 m ist guaranteed
+ Can be assembled quickly and without the use of any tools due to its force-fit and form-fit clamped connections and plug-in frame system components
+ Due to its low height and retractable stabilisers the base ClimTec® can be easily moved through doors once assembled and is therefore the perfect scaffold for interior work
+ Its V-shaped stabilisers provide a maximum of safety by extending the floor area longitudinal and diagonal and ensures near-wall working
+ Extremely safe internal ascent due to its slip-resistant, profiled rungs
+ The ClimTec® basic scaffold with first extension is also suitable for use on stairs and landings

Gefertigt nach neuer Norm DIN EN 1004-1 Produced according to the new Norm

Oberklasse 1,2 Heimwerker Praxis Empfehlung Heimwerker Praxis 3/22

Best Of 2023 Heimwerker Praxis

ClimTec® EXTRAS

ø 125 mm (4 x)

Art.-No. 714169



ø 150 mm (4 x)

Art.-No.914323

10,0 kg

Art.-No. 704306

(1 x)

Art.-No. 714039

ClimTec System

NEW

Transport trolley

The basic scaffold with the first extension respectively the complete scaffold can be converted into a transport trolley using the optionally available castors.





ClimTec System

Aluminium working scaffold

Configurations:

Basic scaffold Art.-No. 710116

1. Extension Art.-No. 710123
Basic scaffold Art.-No. 710116

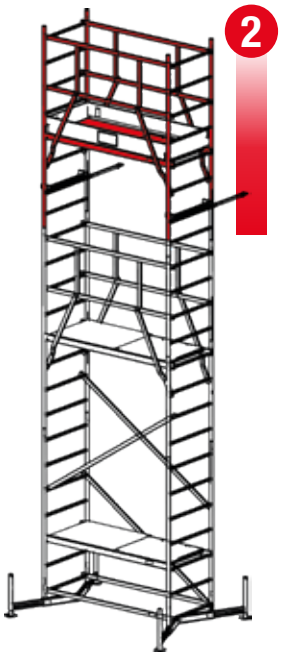

2. Extension Art.-No. 710147
1. Extension Art.-No. 710123
Basic scaffold Art.-No. 710116

		Basic scaffold	Basic scaffold + 1. Extension	Basic scaffold + 1. + 2. Extension
	**A** up to approx.	3.00	5.00	7.00
	B approx.	1.00	3.00	5.00
	C approx.	1.95	4.00	6.00
	Floor area max. m	1.95 x 1.45	1.95 x 1.45	1.95 x 1.45
	Platform size m	1.50 x 0.60	1.50 x 0.60	1.50 x 0.60
	Field length m	1.50	1.50	1.50
	Field width m	0.65	0.65	0.65
	Weight approx. kg	27.5	64.4	100.5
Art.-No.				710147
			710123	710123
		710116	710116	710116

		Basic scaffold	1. Extension	2. Extension
	Length (L) approx. m	2,00	2,15	2,15
	Width (B) approx. m	0,75	0,75	0,75
	Depth (T) approx. m	0,20	0,20	0,25
Weight approx. kg		27,5	36,9	36,1

Article list	Art.-No.	Basic scaffold	1. Extension	2. Extension
Basic frame with stabiliser 1.75 x 0.65 m	715067	2	0	0
Sliding stabiliser	714008	4	0	0
Vertical frame 2.00 x 0.65 m	715012	0	1	2
Vertical frame 1.00 x 0.65 m	715029	0	2	0
Diagonal brace 1.89 m	712707	1	2	0
Platform with hatch 1.50 x 0.60 m	711007	1	1	1
Rail brace 1.59 m	712806	1	1	0
Longitudinal board 1.50 m	713001	0	2	0
Transversal board 0.70 m	713506	0	2	0
Set of stabilisers	714305	0	1	1
Gravity pin	214607	0	7	5
GuardMatic-System®	710673	0	2	2
Tensioning strap set 25 mm, 0.80 m	214751	0	1	0

Spare parts	Art.-No.
Safety set for rail brace/diagonal brace M5 x 65 mm	214584
Safety set for platform M5 x 85 mm	214591
Sliding stabiliser (piece)	714008
Set of screws for ClimTec® stabiliser M8 x 50 mm	718891
Gravity pin	214607
Ballast weight 10 kg	704306
Outrigger	714039
Set of castors Ø 125 mm	714169
Set of castors Ø 150 mm, height-adjustable	914323
Castor Ø 125 mm (piece)	714107
Castor Ø 150 mm, height-adjustable (piece)	914118
Tensioning strap set 25 mm, 0.80 m	214751