

Mobile scaffold series 10

The professional aluminium mobile scaffold for fast and quick assembly.

- + TÜV-approved, suitable for a load of 200 kg/m² (load class 3) in accordance with DIN EN 1004-1
- + Working height up to 14.40 m
- + The safe construction is ensured due to the fixation of the rail frame GuardMatic-System[®] before the next higher platform will be assembled. When climbing through the next platform a complete railing and therefore a fall protection is available
- + The integration of the diagonal braces into the GuardMatic-System[®] guarantees an easy and safe assembly. For transport or storage the rail frame GuardMatic-System[®] can be folded space-saving
- + The 6-point fixation of the GuardMatic-System[®] provides a maximum of safety in the height. The unique KRAUSE self-locking system with a form-fit connection enables an easy, quick and safe erection and dismantling
- + The innovative structure of the diagonal braces ensures maximum floor space on the platform and disturbs in no way
- + Maximum platform distance of 2 m for comfortable and safe erection without tools
- + High-strength steel stabilisers for a maximum of stability (starting with a working height of 4.40 m)
- + Height-adjustable castors (Ø 150 mm) with integrated spindle thread enable the use on uneven ground (stepless adjustment range: 220 – 335 mm)
- + Starting with a working height of 7.40 m the easy-to-fit outriggers with stepless telescopic swivel feet (adjustment range up to 230 mm) provide bracing on each ground and stability for large heights
- + Field lengths: 2.00 m and 2.50 m
- + Scaffold field width: 0.75 m

45%

Faster assembly!
Assembly times are approx. 45% faster than with the old system

STABILO Professional Series 10					
Field length	Field width	Max. working height	Castors	Stabiliser	Ascent via
2.00 m	0.75 m	14.40 m	Ø 150 mm height-adjustable	Steel	Vertical frame
2.50 m					

max. 200 kg/m²

Field length: 2.00 m – Field width: 0.75 m														
	A up to approx.	m	3.00	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40	14.40
	B approx.	m	1.00	2.40	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40
	C approx.	m	2.30	3.50	4.50	5.50	6.50	7.50	8.50	9.50	10.50	11.50	12.50	13.50
Floor area max.		m	0.90 x 2.25	1.85 x 2.25	1.85 x 2.25	1.85 x 2.25	3.20 x 3.85	3.20 x 3.85	3.85 x 3.85	3.85 x 3.85	3.85 x 3.85	3.85 x 3.85	3.85 x 3.85	3.85 x 3.85
Weight		kg	49.5	105.5	139.5	146.5	193.5	201.0	248.0	255.0	289.0	296.5	330.5	337.5
Art.-No.			771018	771025	771032	771049	771056	771063	771070	771087	771094	771100	771117	771124


Field length: 2.50 m – Field width: 0.75 m														
	A up to approx.	m	3.00	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40	14.40
	B approx.	m	1.00	2.40	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40
	C approx.	m	2.30	3.50	4.50	5.50	6.50	7.50	8.50	9.50	10.50	11.50	12.50	13.50
Floor area max.		m	0.90 x 2,75	1.85 x 2,75	1.85 x 2,75	1.85 x 2,75	3.20 x 4.35	3.20 x 4.35	3.85 x 4.35	3.85 x 4.35	3.85 x 4.35	3.85 x 4.35	3.85 x 4.35	3.85 x 4.35
Weight		kg	54.5	116.0	153.5	162.0	212.5	221.5	272.0	280.5	318.0	327.0	364.5	373.0
Art.-No.			772015	772022	772039	772046	772053	772060	772077	772084	772091	772107	772114	772121




Working height: 3.00 m
Platform height: 1.00 m
Scaffold height: 2.30 m




Working height: 4.40 m
Platform height: 2.40 m
Scaffold height: 3.50 m




Working height: 5.40 m
Platform height: 3.40 m
Scaffold height: 4.50 m




Working height: 6.40 m
Platform height: 4.40 m
Scaffold height: 5.50 m




Working height: 7.40 m
Platform height: 5.40 m
Scaffold height: 6.50 m




Working height: 8.40 m
Platform height: 6.40 m
Scaffold height: 7.50 m




Working height: 9.40 m
Platform height: 7.40 m
Scaffold height: 8.50 m




Working height: 10.40 m
Platform height: 8.40 m
Scaffold height: 9.50 m

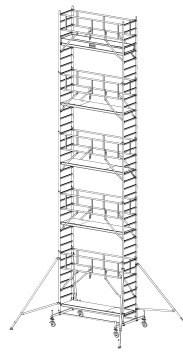


Working height: 11.40 m
Platform height: 9.40 m
Scaffold height: 10.50 m

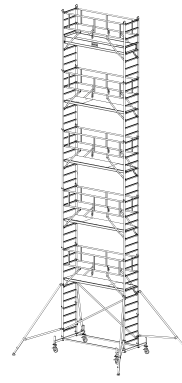

Working height: 12.40 m
Platform height: 10.40 m
Scaffold height: 11.50 m

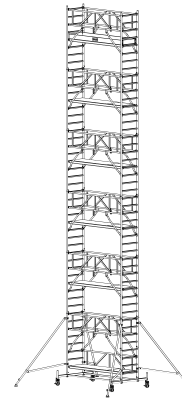

Working height: 13.40 m
Platform height: 11.40 m
Scaffold height: 12.50 m

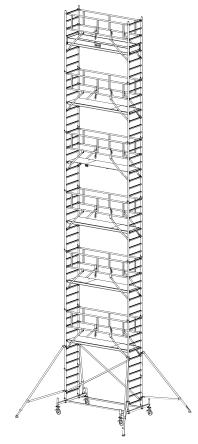

Working height: 14.40 m
Platform height: 12.40 m
Scaffold height: 13.50 m

Working height m	Field length 2.00 m	Field length 2.50 m	3.00	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40	13.40	14.40
Platform height m			1.00	2.40	3.40	4.40	5.40	6.40	7.40	8.40	9.40	10.40	11.40	12.40
Scaffold height m			2.30	3.50	4.50	5.50	6.50	7.50	8.50	9.50	10.50	11.50	12.50	13.50
Description	Art.-No.	Art.-No.	Piece	Piece	Piece	Piece	Piece	Piece	Piece	Piece	Piece	Piece	Piece	Piece
Vertical frame 2.00 m	705167	705167	2	2	3	4	5	6	7	8	9	10	11	12
Vertical frame 1.00 m	705174	705174	0	2	2	2	2	2	2	2	2	2	2	2
Platform with hatch	701213	701220	1	1	2	2	3	3	4	4	5	5	6	6
Railing frame	702517	702500	0	0	1	0	1	0	1	0	1	0	1	0
GuardMatic-System®	702579	702586	0	2	4	4	6	6	8	8	10	10	12	12
Diagonal brace	702852	702845	1	2	0	2	0	2	0	2	0	2	0	2
Rail brace	702210	702203	1	0	0	0	0	0	0	0	0	0	0	0
Base brace	912848	912831	0	2	2	2	2	2	2	2	2	2	2	2
Stabiliser	914071	914071	0	2	2	2	2	2	2	2	2	2	2	2
Outrigger	702760	702760	0	0	0	0	2	2	4	4	4	4	4	4
Transversal board	703743	703743	0	2	2	2	2	2	2	2	2	2	2	2
Longitudinal board	703712	703729	0	2	2	2	2	2	2	2	2	2	2	2
Foot plate galvanised	914026	914026	4	4	4	4	4	4	4	4	4	4	4	4
Set of castors Ø 150 mm height-adjustable	914323	914323	1	1	1	1	1	1	1	1	1	1	1	1
Gravity pin	704405	704405	0	8	10	12	14	16	18	20	22	24	26	28

Accessories and spare parts

All accessories and spare parts for the STABILO mobile scaffold series can be found on page 192 onwards.