


Step ladder for double shelves with round tube rail system

Aluminium shelf step ladder with integrated top guide system for round tube rail system for double shelves, rotatable.

- + High-strength flanged step/side rail connections and profiled steps with a depth of 80 mm for safe ascending and comfortable stand
- + 2 self-arresting braked castors (Ø 80 mm) for easy moving and used in combination with the two-component foot plugs a comfortable and safe standing is ensured
- + Equipped with two running gears at the top end with brakes and plain bearing wheels
- + Aisle width max. 1.60 m
- + The running gear compensates the fluctuations in width up to 2 cm
- + Handrail and holding bar available as accessories
- + Pre-equipped with a wosatec QR code label for easy digitalisation of work equipment inspection documentation

i For your order please note that the vertical height (measurement D) is essential for choosing the right ladder. We produce shelf ladders according to your specifications. Please indicate the exact vertical height (measured from ground to the lower edge of the round tube rail system) as well as the shelf length and the aisle width in your order.

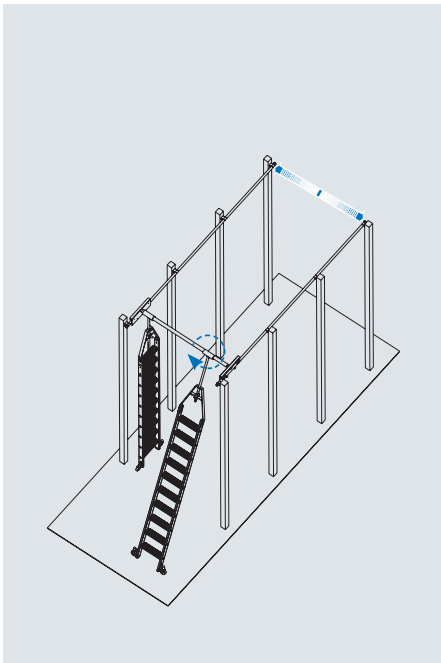

SafetyServices
Page 250

Digital inspection app for work equipment
Info: Page 243



Number of steps		6	7	8	9	10	11	12	13
1	A up to approx.	m 2.70	2.90	3.15	3.40	3.60	3.85	4.10	4.30
	B approx.	m 0.70	0.90	1.15	1.40	1.60	1.85	2.10	2.30
2	C1 approx.	m 1.70	1.95	2.20	2.45	2.70	2.95	3.20	3.45
	C2 approx.	m 2.65	2.90	3.15	3.40	3.65	3.90	4.15	4.40
	D approx.	m 2.45	2.70	2.90	3.15	3.40	3.65	3.85	4.10
	E approx.	m 0.95	1.05	1.15	1.25	1.30	1.40	1.50	1.60
Product weight approx.		kg 13.5	14.2	14.8	15.5	16.0	16.7	17.3	18.0
	Width (B) approx.	m 0.60	0.60	0.60	0.60	0.60	0.60	0.60	0.60
	Depth (T) approx.	m 0.15	0.15	0.15	0.15	0.15	0.15	0.15	0.15
	Length (L) approx.	m 3.05	3.30	3.55	3.80	4.05	4.30	4.55	4.80
Art.-No.		819413	819420	819437	819444	819451	819468	819475	819482