

Tanker Ladder

Free-standing and easy to move tanker ladder for accessing tankers for operating and inspection work.

Specially designed for:

- + Inspection work during loading and unloading
- + Taking samples from tankers and tanker wagons and trailers
- + Safe access for cleaning, de-icing and maintenance work
- + Pre-equipped with a wosatec QR code label for easy digitalisation of work equipment inspection documentation

This ladder offers a wide range of advantages, from providing quick and safe tanker access, to its full-surround rail for creating a safe working space, to the double handrails for extra safety whilst climbing.



Art.-No. 890009



Your benefits:

Especially comfortable and efficient thanks to...

- + Sturdy and robust galvanised steel frame with handles for greater ease when moving it
- + 500 x 900 mm large platform with double rail
- + Height adjustable (rung by rung, 280 mm each), requiring little force thanks to crank and rack
- + Long projecting platform which removes the need for having to move under silos or tanker wagons

Provides a maximum of safety thanks to...

- + Double handrails for maximum safety whilst climbing
- + Large, projecting guard rail cage, available as a round 1,500 x 1,500 mm or square 2,300 x 1,500 mm version
- + Ribbed steps welded to the side rails for maximum safety
- + With self-locking mechanism that stops the ladder from being accidentally moved and the top ladder section sliding back down
- + With extra arrestor for the rack

Specially designed for ease of use thanks to...

- + Easy to maintain rack (as opposed to steel rope that could twist or tear)
- + Ready for immediate use (supplied with ballast weight)
- + Supplied in pre-assembled modules designed for quick assembly




Choose from two different undercarriages:

Undercarriage with plastic tyres

- + Standard plastic castors
- + Easy to move on even ground
- + Swivel foot set (2 pieces – art.-no. 890108) available as an accessory

Undercarriage with inflatable tyres

- + Easy to move, including on uneven ground
- + Incl. height adjustment using swivel feet
- + Includes an extra step
- + Suitable for moving over e. g. embedded rail tracks

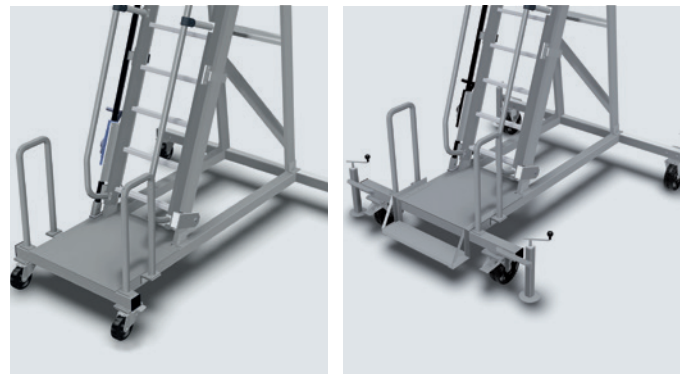

Rail cage executions		round	square
Vertical height of the platform	mm	max. 4,200	max. 4,200
		min. 2,880	min. 2,880
Total height (with handrails)	mm	max. 5,300	max. 5,300
		min. 3,980	min. 3,980
Width of steps/rungs	mm	500	500
Width of stabiliser	mm	2,000	2,000
Rail cage parameters	mm	1,500 x 1,500 rounded edges	1,500 x 2,300
Chassis length	mm	2,305	2,305
Overhanging of the platform	mm	275 – 750	275 – 750
Length of the upper platform	mm	900	900
Length of the lower platform	mm	700	700
Width of the lower platform	mm	740	740
Step up height	mm	290	290
Pushing handrail incl. swivel castors	mm	1,000	1,000
Platform executions		Aluminium corrugated	Aluminium grating
Art.-No. (plastic tyres)		890009	890016
Art.-No. (inflatable tyres)		890047	890054
		Aluminium corrugated	Aluminium grating
		890023	890030
		890061	890078

Accessories (only for use with plastic tyres)



Swivel foot set (2 pieces) for levelling the tanker ladder and extra safety on uneven ground

Art.-No.	890108
----------	--------

Digital inspection app for work equipment

 Info: Page 243