



## CORDA® Multipurpose ladder

Three-section, multi-purpose aluminium ladder that can be used as a leaning, step and extension ladder.

- + Rungs ribbed on all sides
- + Powder-coated steel slide rails for greater ease when extending the ladder
- + Stabiliser for maximum safety
- + Anti-slip end caps
- + Self-locking fasteners for stopping it from opening during use and transport
- + Load capacity of 150 kg

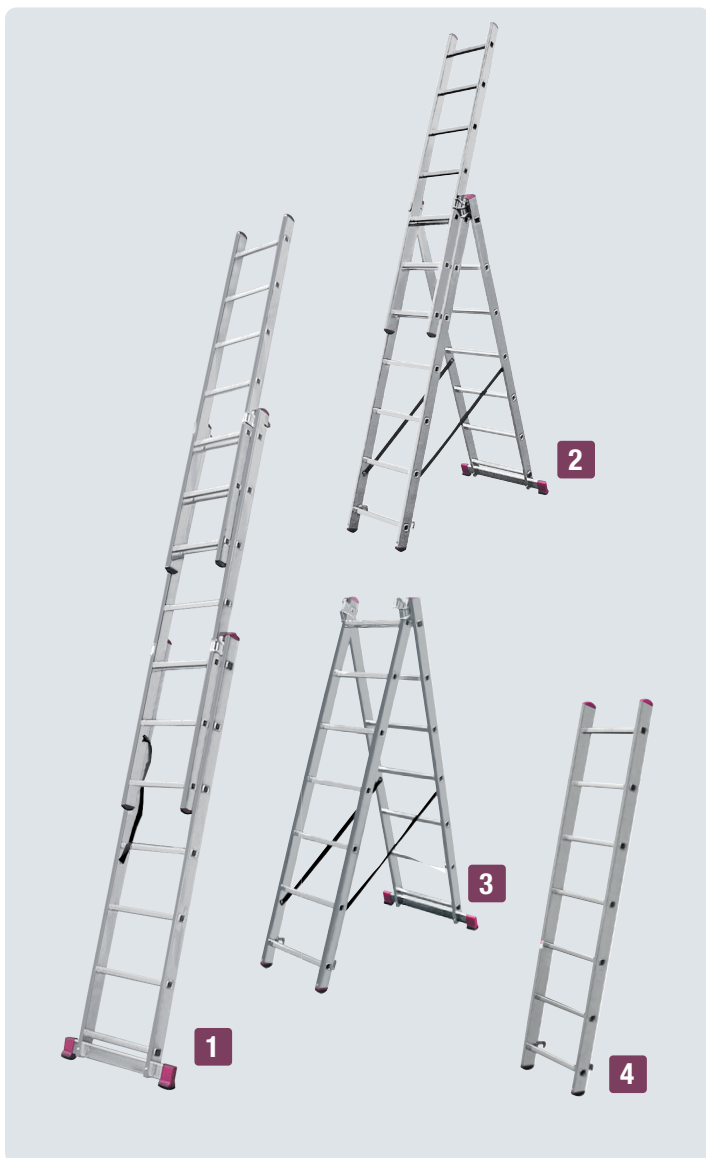

| Number of rungs          |                    |                 | 3 x 6  | 3 x 7 | 3 x 8 | 3 x 9 | 3 x 10 | 3 x 11 |
|--------------------------|--------------------|-----------------|--------|-------|-------|-------|--------|--------|
| 1                        |                    | A up to approx. | m 4.85 | 5.10  | 5.40  | 6.20  | 7.00   | 7.30   |
|                          |                    | B approx.       | m 2.85 | 3.10  | 3.40  | 4.20  | 5.00   | 5.30   |
|                          |                    | C approx.       | m 3.90 | 4.20  | 4.50  | 5.30  | 6.15   | 6.45   |
|                          |                    | D approx.       | m 3.70 | 4.00  | 4.25  | 5.05  | 5.80   | 6.10   |
| 2                        |                    | A up to approx. | m 3.45 | 3.75  | 4.00  | 4.55  | 5.10   | 5.35   |
|                          |                    | B approx.       | m 1.45 | 1.75  | 2.00  | 2.55  | 3.10   | 3.40   |
|                          |                    | C approx.       | m 2.70 | 3.05  | 3.35  | 3.90  | 4.50   | 4.80   |
|                          |                    | D approx.       | m 2.70 | 2.95  | 3.20  | 3.75  | 4.30   | 4.60   |
| 3                        |                    | A up to approx. | m 2.95 | 3.20  | 3.45  | 3.75  | 4.00   | 4.30   |
|                          |                    | B approx.       | m 0.95 | 1.20  | 1.45  | 1.75  | 2.00   | 2.30   |
|                          |                    | C approx.       | m 1.70 | 1.95  | 2.25  | 2.50  | 2.80   | 3.10   |
|                          |                    | D approx.       | m 1.60 | 1.85  | 2.15  | 2.40  | 2.70   | 2.95   |
| 4                        |                    | A up to approx. | m 2.70 | 2.95  | 3.20  | 3.50  | 3.75   | -      |
|                          |                    | B approx.       | m 0.70 | 0.95  | 1.20  | 1.50  | 1.75   | -      |
|                          |                    | C approx.       | m 1.70 | 1.95  | 2.25  | 2.50  | 2.80   | -      |
|                          |                    | D approx.       | m 1.60 | 1.90  | 2.25  | 2.50  | 2.80   | -      |
| Stabiliser width approx. |                    | m               | 0.70   | 0.80  | 0.80  | 0.90  | 1.00   | 1.00   |
| Product weight approx.   |                    | kg              | 9.0    | 10.0  | 12.0  | 13.5  | 16.0   | 18.0   |
|                          | Width (B) approx.  | m               | 0.50   | 0.50  | 0.50  | 0.50  | 0.50   | 0.50   |
|                          | Depth (T) approx.  | m               | 0.20   | 0.20  | 0.20  | 0.20  | 0.20   | 0.20   |
|                          | Length (L) approx. | m               | 1.70   | 2.00  | 2.25  | 2.55  | 2.80   | 3.10   |
| Art.-No.                 |                    |                 | 30368  | 30375 | 30382 | 30399 | 30405  | 30429  |

**Certificate**  
**EN 131**  
Norm

© 2025 by KRAUSE-Merck