


MONTO® Multipurpose rung ladder Tribilo®

Three section aluminium multipurpose ladder usable as a leaning, extension and step ladder with an extendable ladder section

- + Powder-coated steel guiding profiles for easier handling
- + Self-locking levers (AutoSnap System) for safe transport
- + Spreader braces made of weather resistant and tear-proof straps
- + Extra wide stabiliser for a maximum of safety
- + Anti-slip foot caps (Safety Cap)

i The following ladders are suitable for use on stairs:
 Article No. 121226 – 3x8 rungs
 Article No. 121240 – 3x10 rungs
 Article No. 121257 – 3x12 rungs

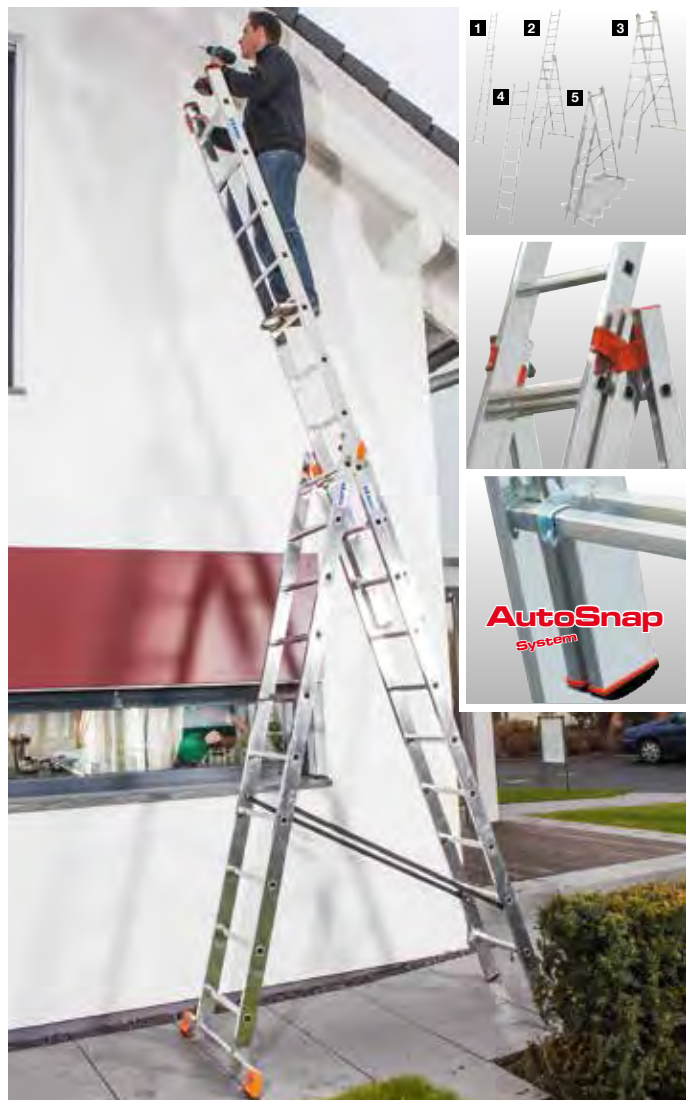

| Number of rungs | | | | 3 x 9 | 3 x 10 | 3 x 12 | 3 x 14 | 3 x 8* | 3 x 10* | 3 x 12* |
|------------------------|--------------------|-----------------|------|--------|--------|--------|--------|--------|---------|---------|
| 1 | | A up to approx. | in m | 6.85 | 7.65 | 9.30 | 10.90 | 6.05 | 7.65 | 9.30 |
| | | B approx. | in m | 4.85 | 5.65 | 7.30 | 8.90 | 4.05 | 5.65 | 7.30 |
| | | C approx. | in m | 6.05 | 6.90 | 8.60 | 10.25 | 5.25 | 6.90 | 8.60 |
| | | D approx. | in m | 5.85 | 6.65 | 8.30 | 9.90 | 5.05 | 6.65 | 8.30 |
| 2 | | A up to approx. | in m | 4.95 | 5.45 | 6.55 | 7.60 | 4.40 | 5.45 | 6.55 |
| | | B approx. | in m | 2.95 | 3.45 | 4.55 | 5.60 | 2.40 | 3.45 | 4.55 |
| | | C approx. | in m | 4.40 | 4.95 | 6.05 | 7.20 | 3.80 | 4.95 | 6.05 |
| | | D approx. | in m | 4.20 | 4.70 | 5.80 | 6.85 | 3.65 | 4.70 | 5.80 |
| 3 | | A up to approx. | in m | 3.85 | 4.10 | 4.65 | 5.20 | 3.60 | 4.10 | 4.65 |
| | | B approx. | in m | 1.85 | 2.10 | 2.65 | 3.20 | 1.60 | 2.10 | 2.65 |
| | | C approx. | in m | 2.70 | 3.00 | 3.55 | 4.10 | 2.40 | 3.00 | 3.55 |
| | | D approx. | in m | 2.55 | 2.85 | 3.35 | 3.90 | 2.30 | 2.85 | 3.35 |
| 4 | | A up to approx. | in m | 3.60 | 3.90 | 4.40 | 4.95 | 3.35 | 3.85 | 4.40 |
| | | B approx. | in m | 1.60 | 1.90 | 2.40 | 2.95 | 1.35 | 1.85 | 2.40 |
| | | C approx. | in m | 2.70 | 3.00 | 3.55 | 4.10 | 2.40 | 3.00 | 3.55 |
| | | D approx. | in m | 2.60 | 2.85 | 3.40 | 3.95 | 2.35 | 2.85 | 3.40 |
| 5 | | A up to approx. | in m | - | - | - | - | 4.40 | 4.95 | 5.45 |
| | | B approx. | in m | - | - | - | - | 2.40 | 2.95 | 3.45 |
| | | C approx. | in m | - | - | - | - | 3.25 | 3.80 | 4.40 |
| | | D approx. | in m | - | - | - | - | 3.10 | 3.65 | 4.20 |
| Product weight approx. | | in kg | | 16.3 | 17.8 | 26.7 | 30.8 | 15.3 | 17.8 | 26.7 |
| | Width (B) approx. | in m | | 0.48 | 0.48 | 0.48 | 0.48 | 0.48 | 0.48 | 0.48 |
| | Depth (T) approx. | in m | | 0.18 | 0.18 | 0.24 | 0.24 | 0.18 | 0.18 | 0.24 |
| | Length (L) approx. | in m | | 2.70 | 3.00 | 3.55 | 4.10 | 2.45 | 3.00 | 3.55 |
| Article No. | | | | 120601 | 120618 | 120625 | 120717 | 121226 | 121240 | 121257 |



Combi-Safety accessories (Aluminium)

Step / Tray


- + Suitable for ladders with rungs for more safety and comfort
- + Usable as a tray for all kind of items when working on rung ladders
- + Can hold up to 150 kg
- + TÜV-approved



Article No.
122063

Ladder spikes (Pair)

- + According to the German Statutory Accident Insurance Body ladders used on natural soft ground have to be equipped with spikes
- + Also usable with ladders with stabilisers
- + Suitable for side rails with a width of 64 x 25 mm to 97 x 25 mm
- + TÜV-approved



Article No.
121400


Side rail extensions

- + To compensate height differences such as stairs, curbs etc.
- + Infinitely adjustable up to max. 600 mm
- + Suitable for side rails with a width of 64 x 25 mm to 97 x 25 mm
- + TÜV-approved



Spacer device

- + Usable in areas with difficult access e.g. ledges, overhanging roofs
- + Telescopic supports, extendable up to 600 mm
- + Suitable for side rails with a width of 64 x 25 mm to 97 x 25 mm
- + TÜV-approved




Article No.
122292

Article No.
122018

Stabiliser

- + To compensate height differences up to 17 cm on stairs/ledges etc.
- + Suitable for side rails with a width of 64 x 25 mm to 97 x 25 mm
- + TÜV-approved



Cross Rail levellers

- + To compensate height differences when using stabilisers on stairs, ledges or uneven ground and for a maximum of stability (extension range up to 230 mm)
- + Suitable for all ladders with stabilisers
- + TÜV-approved



Article No.
121417

Weight kg
1.3

Article No.
122285


MultiBoard

- + To be used in combination with multi-purpose hinged ladders to create a working platform or a placement area
- + Anti-slip and waterproof working platform suitable for a max. load of 150 kg



Wall Holder Set

- + For safe and space-saving storage of ladders with rungs
- + Lockable (Lock not included)
- + Internal dimensions: 270 x 150 mm



Article No.
122261

Article No.
122469