


STABILO® Professional

Rope-operated two section rung ladder

A two section rope-operated aluminium ladder with a rotating and safe height adjustment mechanism

- + With interior rotating guide device to prevent the rope from getting dirty
- + Sturdy, rail surrounding aluminium guiding profiles for a maximum of stability
- + Automatic locking levers for a maximum of safety
- + Anti-slip rungs with a depth of 30 mm, profiled on all sides for a maximum of safety
- + Incl. wall castors for a comfortable extension and retraction of the ladder when making minor height adjustments while the ladder is leaning against a wall for all ladder sizes
- + Sturdy extruded aluminium side rails with reinforced corners
- + Anti-slip foot caps (Safety Cap)

i To avoid the risk that a ladder will turnover while adjusting it is recommended by the German Statutory Accident Insurance Body to use always a rope-operated ladder instead of an extension ladder. (Abridgement of the Guideline BGI 694)



Number of rungs			2 x 15	2 x 18	2 x 20	2 x 24	
1	A	up to approx.	in m	8,45	9,85	10,95	13,10
	B	approx.	in m	6,45	7,85	8,95	11,10
	C	approx.	in m	7,70	9,10	10,30	12,50
	D	approx.	in m	7,45	8,80	9,95	12,00
2	A	up to approx.	in m	5,25	6,05	6,60	7,70
	B	approx.	in m	3,25	4,05	4,60	5,70
	C	approx.	in m	4,35	5,20	5,80	6,90
	D	approx.	in m	4,20	5,00	5,60	6,70
Product weight approx.			in kg	20	27	33	39,5
Width (B) approx.			in m	0,38	0,38	0,42	0,42
Depth (T) approx.			in m	0,14	0,18	0,20	0,20
Length (L) approx.			in m	4,40	5,20	5,80	6,95
Article No.				123411	123428	800701	800749

Accessories:



Conductive foot end plugs

Combi system



①



②



③



④



⑤



⑥



⑧



Pay attention to this label!

All products marked with this label are already approved after production and will facilitate documentation work.



Conductive foot plugs (pair)

- + Resistance < 106 Ω /m
- + Conforms to DIN EN 13463-1

Side rail dimensions	Article No.
64 x 25	212597
77 x 25	212603
97 x 25	212610



Conductive foot caps for stabilisers

- + Resistance < 106 Ω /m
- + Conforms to DIN EN 13463-1

Side rail dimensions	Article No.
64 x 25	212627



Combi-Safety accessories (Aluminium)

Step / Tray


- + Suitable for ladders with rungs for more safety and comfort
- + Usable as a tray for all kind of items when working on rung ladders
- + Can hold up to 150 kg
- + TÜV-approved



Article No.
122063

Ladder spikes (Pair)


- + According to the German Statutory Accident Insurance Body ladders used on natural soft ground have to be equipped with spikes
- + Also usable with ladders with stabilisers
- + Suitable for side rails with a width of 64 x 25 mm to 97 x 25 mm
- + TÜV-approved



Article No.
121400


Side rail extensions

- + To compensate height differences such as stairs, curbs etc.
- + Infinitely adjustable up to max. 600 mm
- + Suitable for side rails with a width of 64 x 25 mm to 97 x 25 mm
- + TÜV-approved

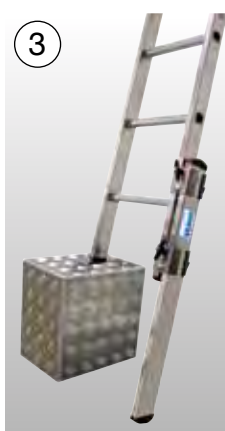

Spacer device

- + Usable in areas with difficult access e.g. ledges, overhanging roofs
- + Telescopic supports, extendable up to 600 mm
- + Suitable for side rails with a width of 64 x 25 mm to 97 x 25 mm
- + TÜV-approved




Article No.
122292

Article No.
122018

Stabiliser

- + To compensate height differences up to 17 cm on stairs/ledges etc.
- + Suitable for side rails with a width of 64 x 25 mm to 97 x 25 mm
- + TÜV-approved



Cross Rail levellers

- + To compensate height differences when using stabilisers on stairs, ledges or uneven ground and for a maximum of stability (extension range up to 230 mm)
- + Suitable for all ladders with stabilisers
- + TÜV-approved



Article No.
121417

Weight kg
1.3

Article No.
122285

MultiBoard

- + To be used in combination with multi-purpose hinged ladders to create a working platform or a placement area
- + Anti-slip and waterproof working platform suitable for a max. load of 150 kg



Wall Holder Set

- + For safe and space-saving storage of ladders with rungs
- + Lockable (Lock not included)
- + Internal dimensions: 270 x 150 mm



Article No.
122261

Article No.
122469